


**X-Treme
Series**

AUTO DRY CABINETS

DATASHEET XT LINE

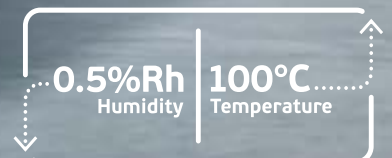

www.x-tremeseries.com



XT Line (1250 lt)

Physical		
External Dimensions (WxHxD)		
XT Line Cabinets	1200 x 1990 x 750 mm	
Internal Dimensions (WxHxD)	Non-Insulated	Insulated
	1197 x 1654 x 630 mm	1178 x 1634 x 630 mm
Net Volume	Non-Insulated	Insulated
	1250 lt	1215 lt
Weight (Depends on Configuration)	190 kg	
Max. Load Capacity of a Shelf	50 kg	
Height from Ground	30 mm	
Body Material	Electrostatic Painted Steel, Stainless Steel Interior Panel	
Door Glass	24 mm Insulating Thermal Glass	
Standard Doors	4 Doors	

Electrical								
Voltage	220 - 240 V AC 50 Hz - 110 V AC 60 Hz (±10%)							
Current / Max Power	10 A - 16 A (Maximum) / 2200 W Max.							
Average Power Consumption	50 W / Hour (Depends on Configuration)							
Max Power Consumption / Hour (Depends on Configuration)	Base	Light	N2	1 st Dryer	2 nd Dryer	45 °C Heater	60 °C Heater	100 °C Heater
XT Line Cabinets	10 W	58 W	5 W	750 W	750 W	1500 W	1500 W	2250

Shelves		
Standard Shelves		Stainless Steel (10 pcs.) (Adjustable)
Shelf Capacity	Material	Stainless Steel
	Maximum / Cabinet	XT 36 pieces (2 in a row) (Adjustable)
	Minimum Shelf Height	60 mm
	Mounting / Demounting	With Shelf Holder Parts, No Tools Required

Operational		
Humidity Set Range		0.5% - 95% RH (Ambient to Set Value)
Temperature Set Range (Optional)		15 °C - 45 °C - 60 °C - 100 °C (Ambient to Set Value)
Time to Reach to Set Humidity Level		<15 min. with one Dryer <7 min with double Dryer (values for 1% RH)
Version 3.0 Software - Industry 4.0		
Display - Control Panel	Type	Touch Screen Display
	Active Area	7"- (155 x 86mm)
	Resolution	800*480 Pixel
Datalogger	Capacity	2 GB
	Connection Type	Wi-Fi (Wireless), Ethernet Cable (Network), USB Flash Disk
	USB (AF Type)	Connector Right and Left Side of the Cabinet
RMS (Remote Monitoring)	Monitoring	via PC, Phone, Tablet
	Connection Type	Wi-Fi (Wireless), Ethernet Cable (Network)
Measurements		
Relative Humidity Measurement	Location	Cabinet inside (Standard), Cabinet outside (Optional)
	Range	0 - 99% RH
	Accuracy	± 0.3% RH (0...20% RH) ± 1.5% RH (20...99% RH) (After Calibration) (Indoor Sensor)
	Resolution	0.01% RH < 10% RH - 0.1% RH > 10% RH (Indoor Sensor)
Temperature Measurement	Location	Cabinet inside (Standard), Cabinet outside (Optional)
	Range	-20 - +110 °C
Temperature Measurement	Accuracy	± 0,5 °C (at 25 °C)
	Resolution	0.1 °C
Date & Time		Date (dd.mm.yy) and Time (hh:mm:ss) display with Real Time Clock (RTC)
Alarm Functions		
Alarm Type		Standard Internal Buzzer, Optional Alarm Light Bar
Alarm Duration		Adjustable, Internal Buzzer: 5 - 255 sec. Alarm L. Bar: 1 - 60 min.
Humidity Level Alarm		Adjustable Offset: 0% RH - 40% RH
Temperature Level Alarm		Adjustable Time After Door Close: 1 - 60 minutes
Door Left Open Alarm		Adjustable Time to Alarm: 10 - 240 seconds
Optional Features		
Secondary Dehumidifier Unit	Advantage	60% decrease in time to reach to set humidity level
	Usage	As Standby, Sharing Drying Task with Intervals
Heater	Capacity	2 x 750 W
	Heating Type	Electrical, Heating Elements and Fans
	Insulation Material	Elastomeric Rubber Foam, Thermal Conductivity < 0,036 W/mK
	Control	Automatic
Lighting	Location	Interior
	Capacity & Type	LED Lamp for XS Line-Fluorescent daylight for XT and XL Line
	Control	Automated: Display Touch, Motion Sensor or Door Open Triggered
Automatic Door Lock	Light ON Time	After Last Trigger, Adjustable: 0 - 240 minutes
	Number of Locks	1 Lock per Door
	Lock Type	Automatic Door Locks by Password, Open / Locked Status Monitoring
Outdoor Sensor	Control	Access Code Used as Password
	Location	Integrated to Body on Top of Right Side of Cabinet
	Measurement	Relative Humidity, Temperature
Alarm Light Bar	Specifications	Same as Cabinet Inside Sensor, Except Accuracy of ± 1.5% Rh
	Type	Buzzer and Two-Colored Lights, Magnetic Base
	Buzzer Noise Level	70 dB (A)
	Light Type and Colors	Yellow and red, 12 V, 5 W lamps
	Shape and Visibility	Cylindrical, 360° View
	Mounting	Easy Attachable with Magnetic Base Plate, Built-In Screw Holes
Connection	4-Pin XLR Connector Behind Cabinet	

The choice of
55 COUNTRIES



SOME OF OUR REFERENCES

LOCKHEED MARTIN



BOEING

BOSCH
Invented for life

SIEMENS

AIRBUS



Honeywell

THALES

Fraunhofer

BAE SYSTEMS

LEONARDO

RHEINMETALL

flex

SAFRAN
AEROSPACE DEFENCE SECURITY

DIEHL
Defence

Continental

PHILIPS



Lenovo

Sandia
National
Laboratories

Westinghouse



Schneider
Electric

Ultra
ELECTRONICS

ERICSSON

B|BRAUN
SHARING EXPERTISE

Megger

Together
ahead. RUAG

Boehringer
Ingelheim



aselsan

VESTEL

arçelik

PHENIX
CONTACT

NASA
National Aeronautics and Space Administration

HAVELSAN

JAGUAR

BRITISH AMERICAN
TOBACCO

ALSTOM

CCS

ayesas

TEI
TEKNOLOJİ VE YATIRIM MENKUL DEĞERLER A.Ş.

TÜRKHAVACILIK
UZAYSANAYİ

GENTEX
CORPORATION

BNA

ESEN

Collins Aerospace

Heraeus

SYSTEM
SENSOR

SEAGATE

MOOG

JABIL

and many more...

X-Treme Series

AUTO DRY CABINETS

The Fastest Dry Cabinets

for Drying & Baking
Electronic Components

Manufactured by EMT Electronics


Çamlıca Mahallesi, Anadolu Bulvarı No:16

Regnum Ticaret Merkezi, B Blok No: 5/1

06200 Yenimahalle ANKARA - TURKEY

T: +90 312 472 20 60 F: +90 312 472 20 65

info@x-tremeseries.com www.x-tremeseries.com



Compliance with IPC/JEDEC-J-STD-033D standards
Compliance with CE and RoHS